


AutoFlush toilet controller for on board, 230 V AC or 24 V DC

Article numbers PR145s01, PR145s02

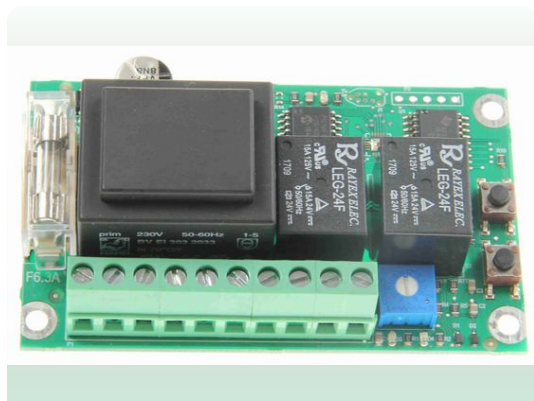

After one press of the button the module starts the discharge pump, flushes the toilet and makes it ready for the next use. The flushing time is adjustable, so the limited water on board is used sparingly. There are two versions: the PR145s01 runs on 230 V AC, the PR145s02 on 24 V DC.

Price on request. Lead time on request. Not in stock? We will make it.

Article number	Version
PR145s01	230 V AC supply
PR145s02	24 V DC supply

Specifications

Supply	230 V AC (PR145s01) or 24 V DC (PR145s02)
Input	Push button (momentary contact)
Output	Discharge pump, switched by a relay
Setup	Flushing time adjustable
Dimensions	Board 86 x 52 mm
Mounting	Four mounting holes Ø 3.5 mm, 80 x 42 mm centre to centre

More information, price and lead time: www.procircuits.nl/en/products/pr145

ProCircuits B.V. · Van Nijenrodeweg 903, 1081 BJ Amsterdam, Netherlands · +31 6 45 77 55 93 · willem@procircuits.nl ·

Chamber of Commerce (KVK) 87009870

We supply businesses only.