


4-20 mA to ± 10 V signal conditioner, isolated, with display

Article number PR181x088

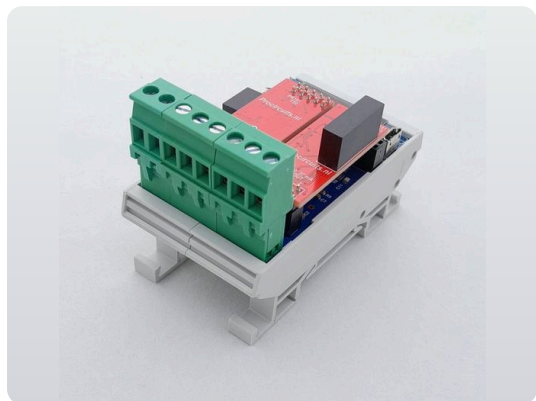

The PR181x088 converts a 4-20 mA or 0-20 mA current signal into a voltage of -10 to +10 V. The output is galvanically isolated. Lower and upper limits of input and output are set on the display, as is the rise and fall rate of the output. As delivered, 4 mA at the input gives -10 V and 20 mA gives +10 V.

Price on request. Lead time on request. Not in stock? We will make it.

Specifications

Supply	12 or 24 V DC
Input	4-20 mA or 0-20 mA on terminal 4
Output	-10 to +10 V; lower and upper limit adjustable
Isolation	Output galvanically isolated
Setup	Display with UP, OK and DOWN buttons
Rise and fall rate	Adjustable on the display
Dimensions	45 x 83 mm with DIN rail enclosure, 42 x 72 mm without
Factory setting	4 mA input = -10 V, 20 mA = +10 V

Connections

Terminal 1 Supply plus

Terminal 2 Supply minus

Terminal 3 Minus, internally connected to terminal 2

Terminal 4 4-20 mA or 0-20 mA input (plus)

Terminal 5 Not used

Terminal 6 Isolated output common (0 V)

Terminal 7 Isolated -10 to +10 V output

Terminal 8 Not used

Setup

1. Connect the module according to the terminal table and switch on the supply.
2. Set the input to its lowest level, for example 4 mA. In the menu, select IN1 – Set minimum, press OK, select YES and press OK again.
3. Set the input to its highest level, for example 20 mA. Select IN1 – Set maximum, press OK, select YES and press OK again.
4. Set the lower limit of the output with OUT1 minimum adj: change the value with UP and DOWN and confirm with OK.
5. Set the upper limit of the output in the same way with OUT1 maximum adj.
6. If required, set the rise and fall rate of the output with IN1 Ramp-Up and IN1 Ramp-Down.
7. Fine adjustment: IN1 minimum adj and IN1 maximum adj fine-tune the input limits. Setting OUT1 invert to 1 reverses the output: the lowest input level then gives the highest output level.
8. Go to the SAVE menu to store the new settings.

More information, price and lead time: www.procircuits.nl/en/products/pr181x088

ProCircuits B.V. · Van Nijenrodeweg 903, 1081 BJ Amsterdam, Netherlands · +31 6 45 77 55 93 · willem@procircuits.nl ·

Chamber of Commerce (KVK) 87009870

We supply businesses only.