


8 push buttons on DIN rail

Article number PR192T04

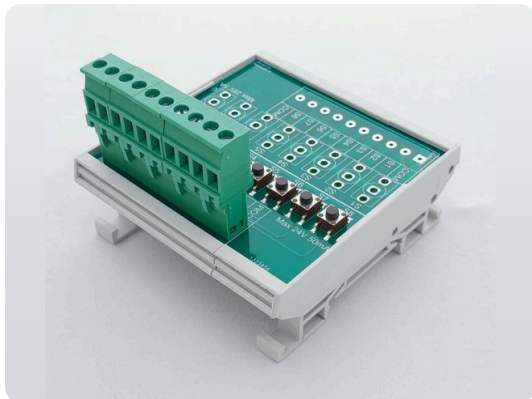

The PR192T04 has eight push buttons that close a normally open contact while pressed. Each button switches between its own terminal (S1 to S8) and the common terminal COM. The contacts switch up to 24 V DC and 50 mA per contact.


Price on request. Lead time on request. Not in stock? We will make it.

Specifications

Output	8 normally open contacts (NO) with one common terminal (COM)
Switching capacity	24 V DC and 50 mA DC max. per contact
Dimensions	80 x 83 mm with DIN rail enclosure, 76.25 x 72 mm without
Mounting	DIN rail

Connections

Terminal COM (2x)	Common terminal of all push buttons, at both ends of the terminal strip
Terminal S1 – S8	Normally open contact (NO) of push button 1 to 8

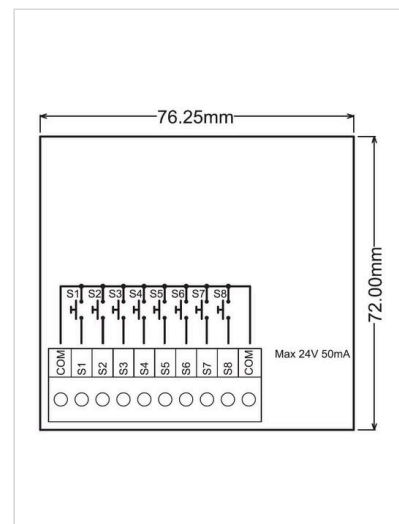

More information, price and lead time: www.procircuits.nl/en/products/pr192t04

ProCircuits B.V. · Van Nijenrodeweg 903, 1081 BJ Amsterdam, Netherlands · +31 6 45 77 55 93 · willem@procircuits.nl ·

Chamber of Commerce (KVK) 87009870

We supply businesses only.